City of Fort Wayne Public Meeting

June 30, 2022



Leesburg Road Extension

Phase 1 – Jefferson Blvd to Main St

Phase 2 – Intersection of Jefferson Blvd and

Main St







Leesburg Road Extension Project



- 1. Project Location
- 2. Purpose & Need
- 3. Overview of Project
- 4. Tentative Project Timeline
- 5. Open House





1. Project Location









2. Purpose & Need



Purpose

Enhance traffic mobility, improve vehicular and pedestrian safety, and address increasing traffic.


Need

Support the land use, economic development and growth objectives of metropolitan transportation plans established by Northeast Indiana Regional Coordinating Council (NIRCC).









2. Purpose & Need



Vehicular Safety

From 2017 to 2019:

- Twelve (12) vehicular accidents occurred at the Leesburg
 Rd/Main St intersection
- Forty-nine (49) accidents occurred at the Jefferson Blvd/Main St intersection
 - Twenty-seven (27) of the total crashes were rear end collisions
 - Fifteen (15) of the total crashes included injuries







Project Scope:

- Extension of Leesburg Road to Jefferson Boulevard
 - 2-Lane section with curb and gutter
 - Realignment of existing roadway
- Intersection Improvements
 - Single lane roundabout at Leesburg and Main
 - Signalized intersection at Leesburg and Jefferson
 - Reconfigured intersection at Jefferson and Main
- New 5' Sidewalks
- New Three-Sided Box Structure over Junk Ditch
- Stormwater Improvements
 - New enclosed storm sewer
 - Detention pond
- Green Infrastructure
- New Street Lights












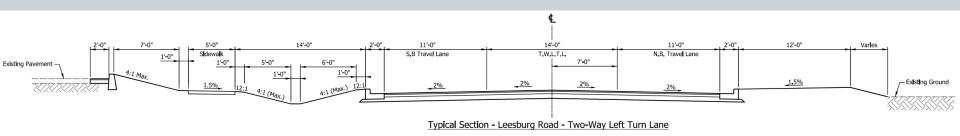

5'-0" 14'-0" 11'-0" 11'-0" 16'-0" Varles Sldewa**l**k S.B Travel Lane N.B. Travel Lane 1'-0" 5'-0" 6'-0" 1'-0" 1'-0" _1.5% - Existing Ground Existing Ground -Typical Section - Leesburg Road - Two Lanes







Intersection of Leesburg and Jefferson:









Leesburg Road Extension Alignment:









Roundabout – Leesburg Rd. and Main St.









Intersection of Jefferson Blvd & Main St:











4. Tentative Project Timeline



Stage 2 (60% Complete Plans) Summer 2022

Stage 3 (90% Complete Plans) Fall 2022

Begin Right-of-Way Acquisition Spring 2023

Final Public Meeting Summer 2023

Final Plans (100% Complete) Summer 2023

Project Bid & Begin Construction Fall 2023



3. Tentative Project Timeline



Construction Completion - Phase 1: Spring 2024 - Spring 2025 Leesburg Road from Jefferson Blvd to Main St

Construction Completion - Phase 2: Fall 2024 - Fall 2025
Intersection of Jefferson Blvd and Main St





4. Open House



- Visit with Project Staff
- Review Preliminary Plans
- Give Input on Current Issues
 - Stormwater
 - Traffic
- Discuss Concerns







Project Contacts



City of Fort Wayne:

Patrick Zaharako, PE, MBA - City Engineer Patrick.Zaharako@cityoffortwayne.org
(260) 427-2789

American Structurepoint, Inc.:

Scott Crites, PE – Project Manager scrites@structurepoint.com
(260) 373-0600

Seth Boyd, PE – Project Designer sboyd@structurepoint.com (260) 373-0600

Kelly White, PE - Assistant City Engineer Kelly.White@cityoffortwayne.org (260) 427-2693

Jeff Byrd, PE – Project Designer jbyrd@structurepoint.com (574) 287-2231





