


City Utilities Design Standards Manual

## GENERAL RIGID PIPE BEDDING DETAIL

Created: January 1, 2002

Scale: N.T.S.

Revised: January 24, 2017

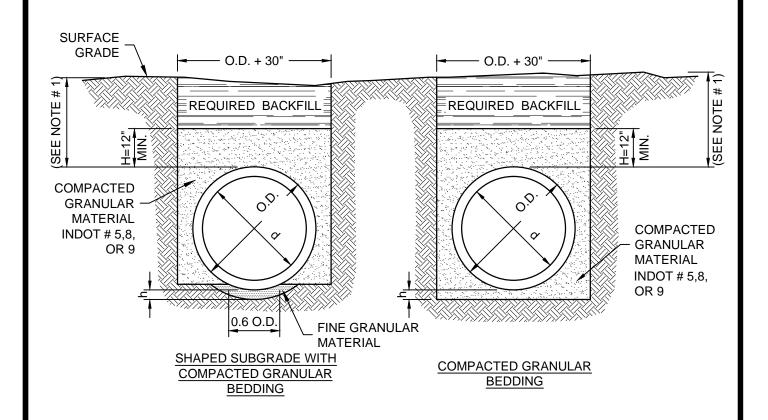

## LEGEND:

O.D.= OUTSIDE DIAMETER

H= BACKFILL COVER ABOVE TOP OF PIPE

d= INSIDE DIAMETER

h= ; O.D. 4" MINIMUM

## NOTES:

- 1. MINIMUM COVER STORMWATER 3', SANITARY 4', WATER 5'.
- 2. FOR ROCK OR OTHER NON-COMPRESSIVE MATERIALS; THE TRENCH SHOULD BE OVER-EXCAVATED A MINIMUM OF 6" AND REFILLED WITH GRANULAR MATERIAL.