




# TEST RISER IN PAVEMENT

Created: January 4, 2007

Revised: July 8, 2016

Scale: N.T.S.

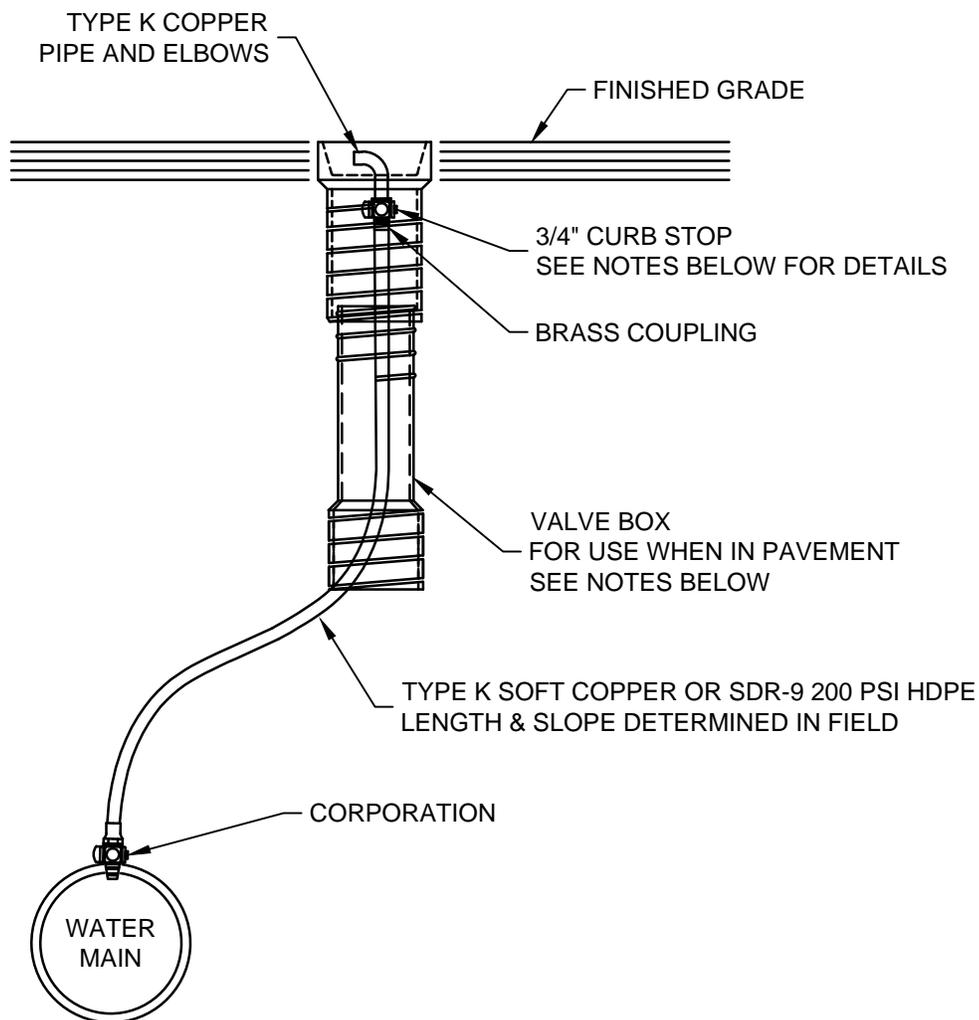

## NOTES:

1. FOR TEST RISER LOCATIONS PROPOSED TO BE IN PAVEMENT, CURB STOP SHALL BE INSTALLED 4 IN. BELOW FINISHED GRADE IN VALVE BOX OR COPPER SHOULD BE EXTENDED FROM TAP TO POINT OUTSIDE PAVEMENT.
2. TEST RISERS SHALL BE INSTALLED AND REMOVED BY CONTRACTOR UNLESS NOTED OTHERWISE.
3. TEST RISER REMOVAL SHALL CONSIST OF CLOSING LOWER CORPORATION AND REMOVING ALL OTHER MATERIALS.