




CURB RAMP TYPE F

NOT TO SCALE

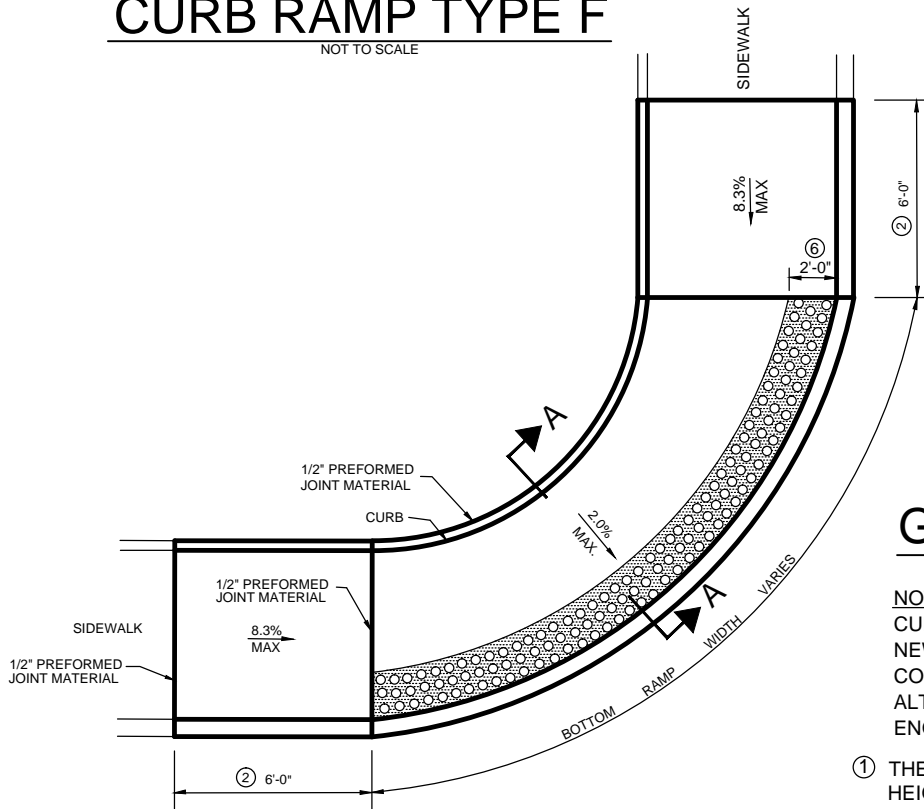


GENERAL NOTES


NOTE:

CURB RAMP BE SHALL NOT BE USED ON NEW CONSTRUCTION, BUT ONLY WHEN FIELD CONDITIONS WARRANT FOR EXISTING SIDEWALK ALTERATIONS. THIS RAMP REQUIRES CITY ENGINEER'S APPROVAL.

- ① THESE DIMENSIONS ARE BASED ON A 6" CURB HEIGHT, AND SHALL BE PROPORTIONALLY ADJUSTED FOR OTHER CURB HEIGHTS.
- ② A 4'-0" MINIMUM WIDTH RAMP MAY BE USED WITH ENGINEERS APPROVAL WHEN EXISTING SPACE PROHIBITS THE CONSTRUCTION OF THE 6'-0" WIDE RAMP.
- ③ THE BOTTOM EDGE OF THE CURB RAMP SHALL BE FLUSH WITH THE EDGE OF THE ADJACENT PAVEMENT AND GUTTER LINE.
- ⑥ DETECTABLE WARNING SURFACE SHALL BE BRICK RED IN COLOR. SEE SPECIAL PROVISIONS FOR ACCEPTED TACTILE WARNING UNITS.

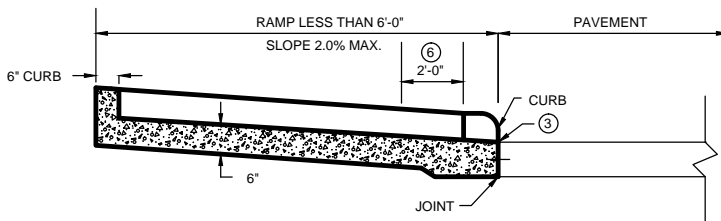

SECTION A-A

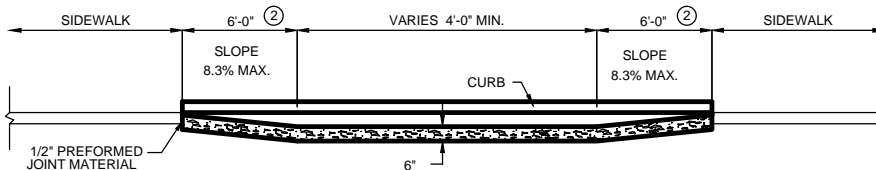

CURB ELEVATION