

Requirements for Sign installation

- 1) All sign installations shall meet INMUTCD standards for road signs and posts. The standard signpost (*) shall be
- 2) 2 1/4" X 2 1/4" X 42" 12 gage Galvanized square 7/16"holes, 1" centers all 4 sides length of post for base,
- 3) 2" X 2" X 10" 14 gage Galvanized square 7/16"holes, 1" centers all 4 sides length of post square for the upright




a) (*) If a signpost will be in pavement or sidewalk, the anchor shall be a V-Loc post anchor for 2" X 2" square post. These anchors cannot be substituted for a Square sleeve in soil. Orientation view is on 2nd page



4) The sign installation should be a minimum of 2' to a maximum of 6' off the road to the edge of the sign. The sign height should be 7' +/- 3" from the nearest edge of the pavement to the bottom of the main sign or 6' +/- 3" to the bottom of a secondary sign.

ENGAGE • INNOVATE • PERFORM

CITIZENS SQUARE 200 E. Berry St. • Fort Wayne, Indiana • 46802-1804 • www.cityoffortwayne.org An Equal Opportunity Employer

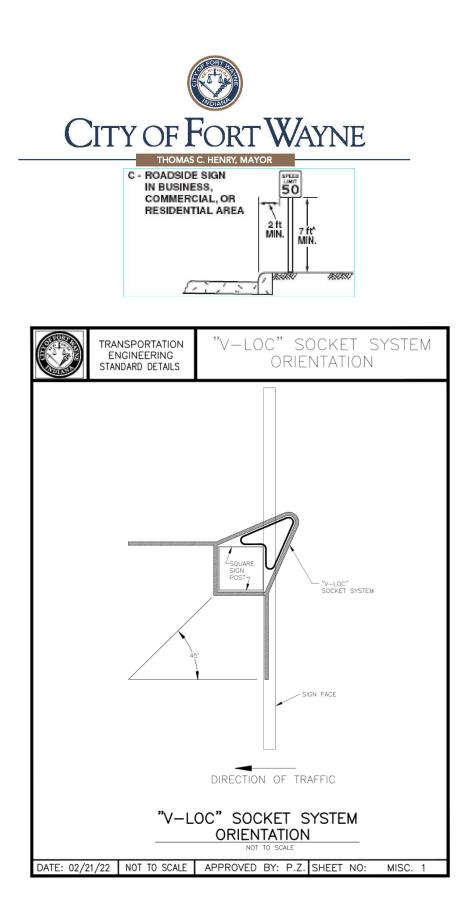

ENGAGE • INNOVATE • PERFORM

CITIZENS SQUARE 200 E. Berry St. • Fort Wayne, Indiana • 46802-1804 • www.cityoffortwayne.org An Equal Opportunity Employer